



# olixLink™ C1 5G / WiFi6 RCU

Dual-SIM | Plug & Play | VPN – Integrated | IP66 | ROS | Gigabit POE+ LAN



Technical Document No. 1772701025 | SKU# OL VX-C1-5GW6-ETH-POE | Revision V1.0 – MAR 2026

**Olive Robotics GmbH**

Daimlerstrasse 7, 85521 Ottobrunn, Germany



© 2026 Olive Robotics GmbH - All rights reserved.

[www.olive-robotics.com](http://www.olive-robotics.com)  
[contact@olive-robotics.com](mailto:contact@olive-robotics.com)

### 1. Product Overview


Outdoor ready 5G router, armed with a six-antenna array for wide-range, full-coverage, gives your robot an encrypted VPN link for real-time control and support from anywhere. OlixLink™ C1 ensures your robot never loses connection, whether in a lab, factory, or outdoors. With global 5G NR SA/NSA support and dual SIM slots, it automatically switches networks to keep the link alive. Add WiFi 6 dual-band performance, and you've got seamless coverage for both research and industrial environments.

### 2. Key Features

- **Worldwide Access:** Secure 5G VPN enables worldwide, low-latency remote robot access
- **Teleoperation:** Real-time teleoperation supports remote control, diagnostics and updates
- **Easy Setup:** Zero-effort setup comes preconfigured, power on and start
- **Security:** Highly secure end-to-end encryption protects your robots and data
- **Connectivity:** Flexible dual-SIM 5G connectivity automatically selects the strongest carrier
- **Durability:** IP-rated hardware with high-gain antennas delivers robust 5G up to 2400 Mbps
- **ROS 2 Monitoring:** C1 provides a real-time status and diagnostics via a native ROS 2 node



### 3. System Architecture

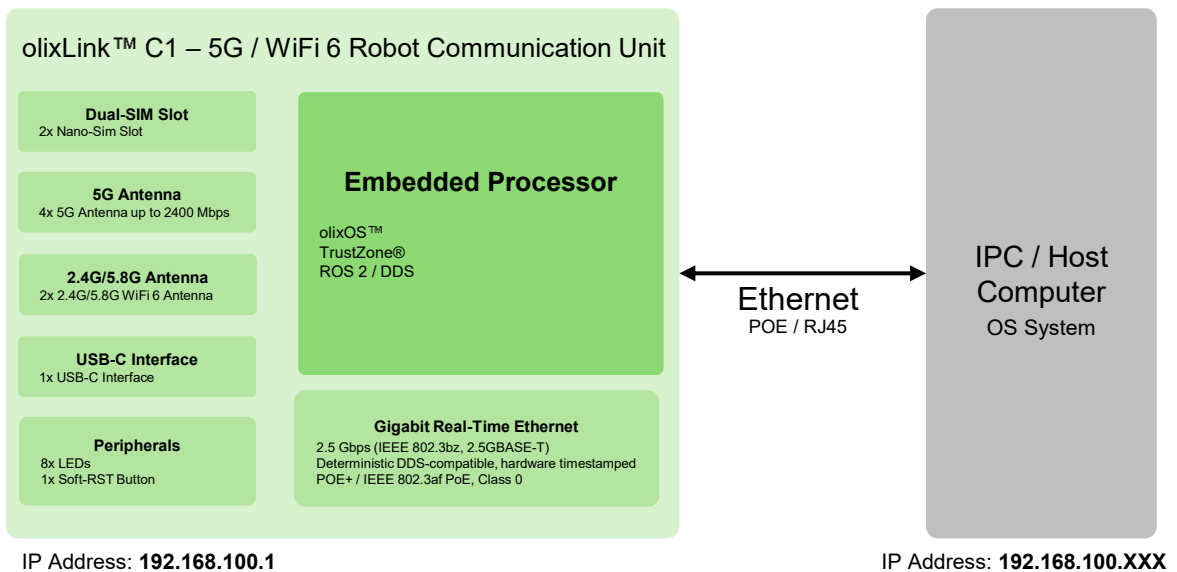

## 4. Applications

- Mobile Robots (AMR, AGV, UAV)
- Field & Outdoor Robotics
- Industrial Automation & Smart Factories
- Remote Support & Telemaintenance
- Research & Prototyping Platforms
- Infrastructure & Security Robotics

## 5. Specifications

### - Physical and Electrical

Parameter	Value
Weight	760g
Size	135.0 mm x 140.0 mm x 45.0 mm
Power Consumption	Max. 30W
Operating Voltage	48V/0.6A (POE+ Standard)
Operating Temperature	-10°C to 85°C
Interface LEDs	8x (Power, SIM-Card, RF, System, WiFi )

### - WiFi

Version	WiFi 6
WiFi Dual-Band	2.4G and 5.8G connectivity
Speed	Up to 2400 Mbps (5.8 G) and 600 Mbps (2.4G)
Compatibility	IEEE 802.11b/g/n/AC/AX
Encryption	WPA2/WPA3


### - Communication Interface / ODR

Interface Connector	Ethernet RJ45 / LAN
Communications Protocol	2.5 Gbps (IEEE 802.3bz, 2.5GBASE-T)
Middleware / Protocols (DDS)	- rmw_fastrtps_cpp - rmw_cyclonedds_cpp
ROS 2 Distribution	- Humble


### - ROS 2 Native Messages

Topic / Service Name	Type	Description
/status	<a href="#">diagnostic_msgs/msg/DiagnosticArray</a>	OlixLink™ C1 Status


- Router Interface / Peripherals

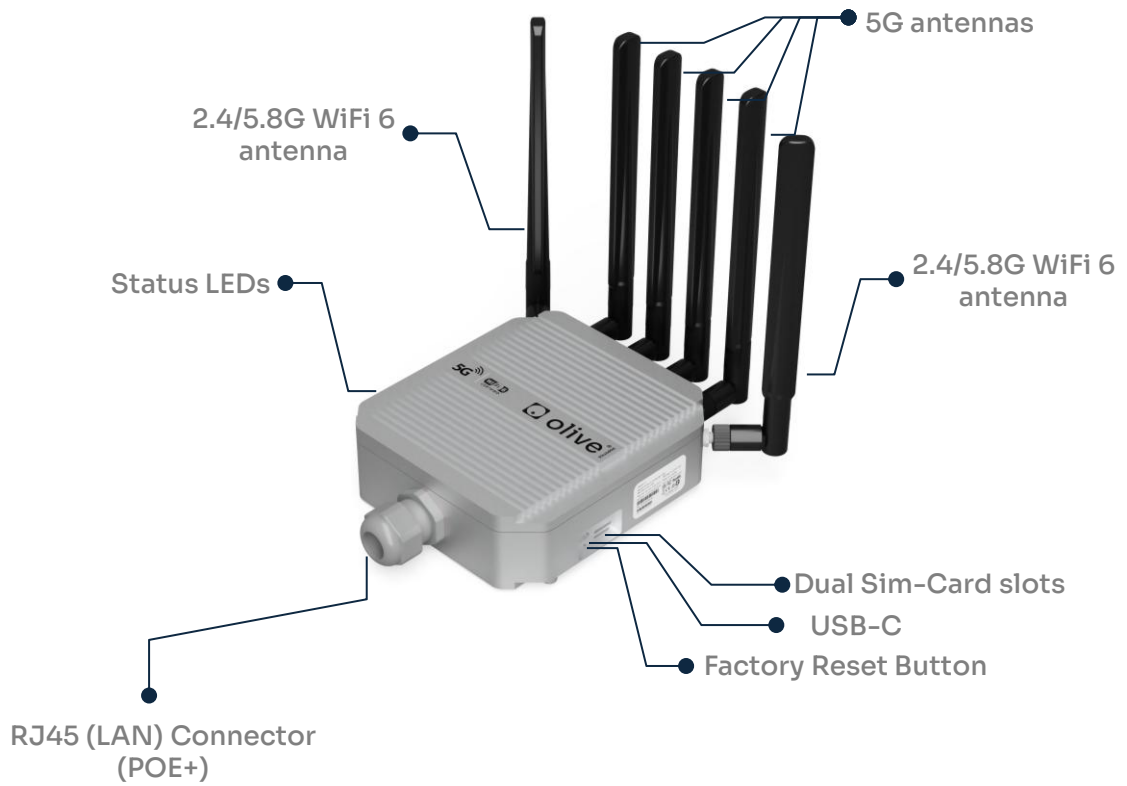


- Physical Dimensions

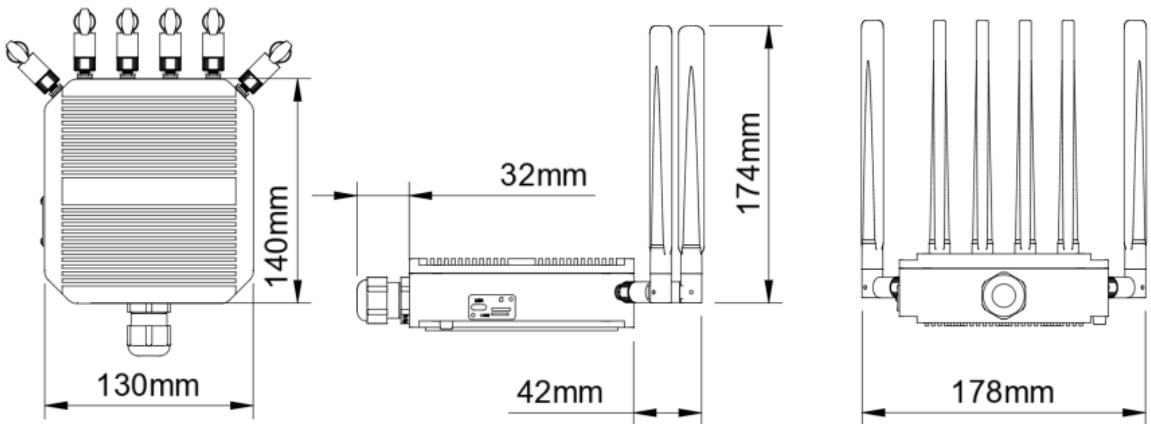


- Connector Specification

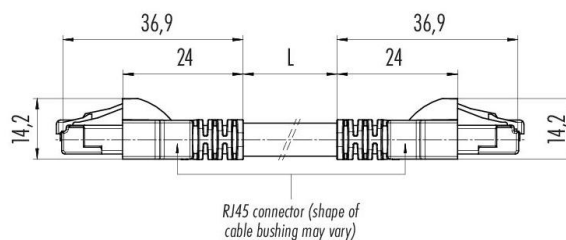

## - Mechanical Installation Overview

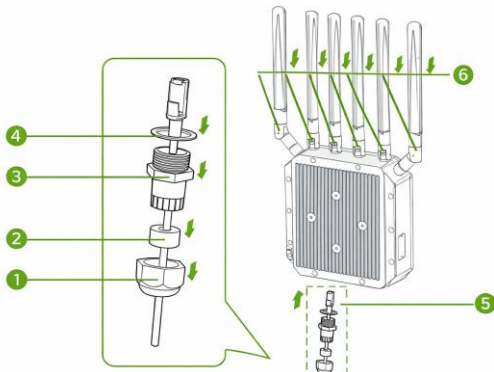

1. Pass the RJ45 cable through the waterproof connector cover.
2. Screw the waterproof seal into the waterproof connector cover.
3. Pass the RJ45 cable through the waterproof connector bracket and screw the waterproof connector bracket into the cover.
4. Put the waterproof sealing ring on the waterproof connector bracket.
5. Connect the RJ45 cable to WAN/LAN port
6. Screw the antennas into the 2.4G/5.8G and 5G antenna connector.




**Note:** Turn the wrench counterclockwise during the assembly to tighten the bracket. Turn the wrench clockwise to loosen the bracket during disassembly

### ⚠ Waterproof Mounting Requirement

The Router must be installed exactly as specified to maintain the IP66 waterproof rating. Improper installation, including incorrect sealing or mounting, will compromise the enclosure and invalidate the IP66 protection. Failure to comply may result in water ingress and permanent damage to the Router.

## - Mounting Instructions

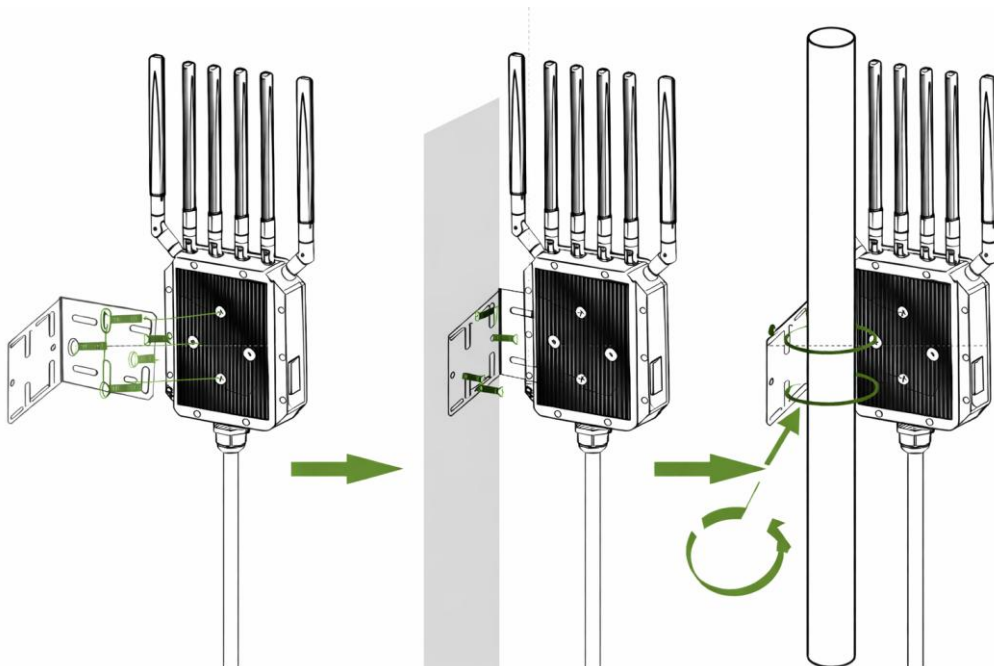

1. Mount the bracket onto the router

2.1. Secure the bracket by screwing it to a mounting surface


2.2. **Or** by using the included hose clamps to fasten it around a pipe

### - Performance Tests


Network latency and jitter characterization was performed using a IMU data stream at 100 Hz over 10 minutes per Wi-Fi (2.4Ghz and 5.8Ghz) and 5G over the Network (Connection via ZeroTier). IMU messages were acquired on Computer A (wired Ethernet) and transmitted via UDP through Router C1 to Computer B (wireless). Both systems were synchronized using NTP. Each IMU packet carried a sender timestamp, allowing measurement of one-way latency, round trip time, and RFC3550-style smoothed jitter. Round-trip time (RTT) was measured using application-level acknowledgments. The test reflects steady-state network performance under realistic operating conditions.

Additionally, a reference latency test was performed over 5G connection to the external Google DNS server (dns.google.com, IP 8.8.8.8)


#### - 2.4G WiFi

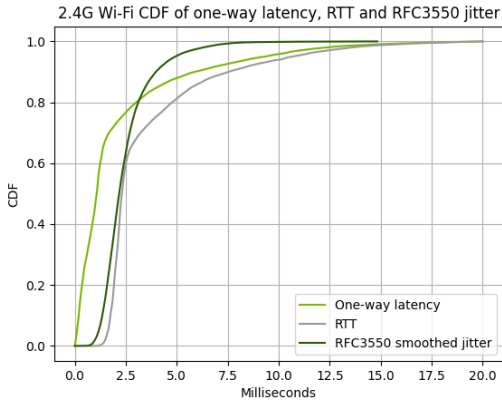


#### - 5.8G WiFi

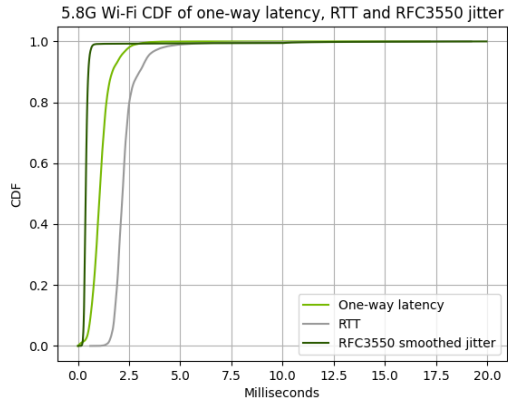

#### - 5G over ZeroTier

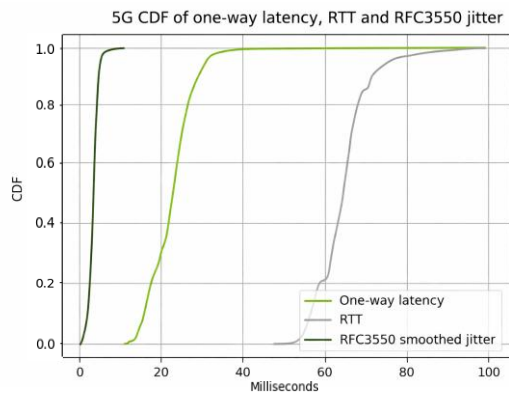

#### - 5G Google DNS Server

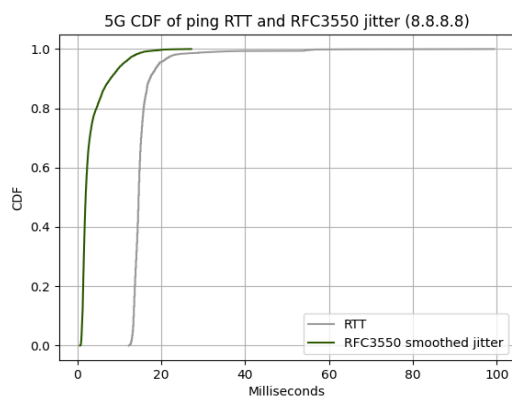



**Olive Robotics GmbH**

Daimlerstrasse 7, 85521 Ottobrunn, Germany

**[www.olive-robotics.com](http://www.olive-robotics.com)**

**[contact@olive-robotics.com](mailto:contact@olive-robotics.com)**

Technical Document No. 1772701025 | SKU# OLVX-X1-PIMU-ETH-POE | Revision V1.0 - MAR 2026

Disclaimer - This document and the information contained herein are provided by Olive Robotics GmbH ("Olive Robotics") for informational purposes only. While every effort has been made to ensure the accuracy and reliability of the content at the time of publication, all information is provided "as is", without warranties of any kind, either express or implied, including but not limited to warranties of merchantability, fitness for a particular purpose, non-infringement, or accuracy. No representation is made, and no liability is assumed, for the completeness, accuracy, or reliability of the information, specifications, figures, or performance characteristics described herein. Users are solely responsible for evaluating the suitability of the information and the products described for their intended use. Olive Robotics reserves the right to modify, correct, enhance, or otherwise amend its products, specifications, documentation, and this publication at any time and without prior notice. This document supersedes all prior documentation relating to the subject matter contained herein. Use of any Olive Robotics product must comply with all applicable laws, standards, and regulations, and is subject to the terms and conditions of sale and/or licensing in effect at the time of purchase or use. For the latest version of this document or for additional product support, please visit [www.olive-robotics.com](http://www.olive-robotics.com) or contact an authorized representative of Olive Robotics GmbH.